



Can be used when the unit is surface mounted.



The edge illumination signs use a technology that is friendly towards the environment due to its small consumption from the mains power supply. Each model combines modern aesthetics and technological functionality. They are used in every area where public orientation and aesthetics must be combined. These luminaires can be used as maintained illuminated signs.

They consist of two pieces, the illuminated sign with the LEDs and the control circuit which is placed on the ceiling or the wall. They can also be recess mounted on a suspended ceiling using the mounting springs contained in the package.

In models SLD-XX/SP, the new adjustable lighted legend mounting device, permits the mounting of the unit on walls or ceilings. Recess mounting on a suspended ceiling can be accomplished if the special mounting springs (contained in the package) are used.

The SLD-XX/DZ model is supplied with suspension wires to allow longer drops for installations with high ceilings. Standard length of wire is 1m. Other lengths supplied on request.



- ▶ The smallest profile on the market (only 1,5cm)
- ▶ Double sided markings
- ▶ High luminosity white LEDs with a great life span.
- ▶ Surface or recess mounting capability
- ▶ 3 hour duration with Ni-MH batteries
- ▶ Friendly towards the environment
- ▶ Test button - Charge indication LED
- ▶ Produced in accordance with European norms EN 60598-1, EN 60598-2-22

EDGE ILLUMINATION SIGNS WITH LEDs "Lounge Light"

SELF-TESTING, MAINTAINED EDGE ILLUMINATION SIGNS

TYPE	OPERATION VOLTAGE	CONSUMPTION	BATTERY Ni - MH	DURATION	POWER OF LIGHT SOURCE	WEIGHT
SLD-28/SP	220-240V AC/ 50Hz	7 VA	3.6V/1.5Ah	3 hours	45 / 45 lm	1350 gr.
SLD-34/SP	220-240V AC/ 50Hz	7 VA	3.6V/1.5Ah	3 hours	55 / 55 lm	900 gr.
SLD-44/SP	220-240V AC/ 50Hz	7 VA	3.6V/1.5Ah	3 hours	55 / 55 lm	1650 gr.
SLD-64/SP	220-240V AC/ 50Hz	8 VA	3.6V/ 1.5Ah	3 hours	75 /100 lm	2730 gr.

SELF-TESTING, MAINTAINED EDGE ILLUMINATION SIGNS

SLD-28/DZ	220-240V AC/ 50Hz	7 VA	3.6V/1.5Ah	3 hours	45 / 45 lm	900 gr.
SLD-34/DZ	220-240V AC/ 50Hz	7 VA	3.6V/1.5Ah	3 hours	55 / 55 lm	1650 gr.
SLD-44/DZ	220-240V AC/ 50Hz	7 VA	3.6V/1.5Ah	3 hours	55 / 55 lm	1350 gr.

EDGE ILLUMINATION SIGNS FOR CENTRAL UNITS 230V AC

SLD-28/CBS/SP	220-240V AC/ 50Hz	7 VA	—	—	—	980 gr.
SLD-34/CBS/SP	220-240V AC/ 50Hz	7 VA	—	—	—	1080 gr.
SLD-44/CBS/SP	220-240V AC/ 50Hz	7 VA	—	—	—	1700 gr.
SLD-64/CBS/SP	220-240V AC/ 50Hz	—	—	—	—	—

EDGE ILLUMINATION SIGNS FOR CENTRAL UNITS 230V AC

SLD-28/CBS/DZ	220-240V AC/ 50Hz	7 VA	—	—	—	980 gr.
SLD-34/CBS/DZ	220-240V AC/ 50Hz	7 VA	—	—	—	1080 gr.
SLD-44/CBS/DZ	220-240V AC/ 50Hz	7 VA	—	—	—	1700 gr.
SLD-64/CBS/DZ	220-240V AC/ 50Hz	—	—	—	—	—

ACCESSORIES

A-1080	10cm extension rod	A-1082	40cm extension rod
A-1081	20cm extension rod	A-1083	Connection tie

Packing

Package dimensions per piece (LxWxH)

SLD 28/DZ, SLD 28/SP : 36 x 22,5 x 5 cm

SLD 34/DZ, SLD 34/SP : 36 x 22,5 x 5 cm

SLD 44/DZ, SLD 44/SP : 48 x 32 x 5 cm

SLD 64/DZ, SLD 44/SP : 48 x 32 x 8.5 cm



LEDs of high luminosity



3 hours



3.6V/1.5Ah



16 m. SLD-28

34 m. SLD-44



MARKING OVERLAY

Marking overlay contained in the package. Please define during the order The type of sign.




left or right

down


SW28/R ----- (for SLD-28) ----- SW28/D

SW34/R ----- (for SLD-34) ----- SW34/D

SW44/R ----- (for SLD-44) ----- SW44/D

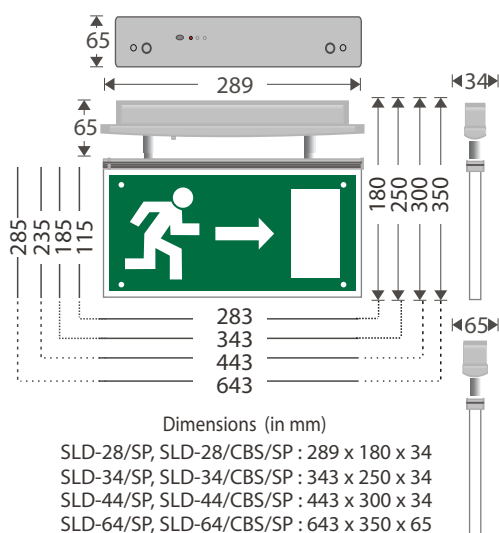


The special box contained in the package must be used when the unit is surface mounted.

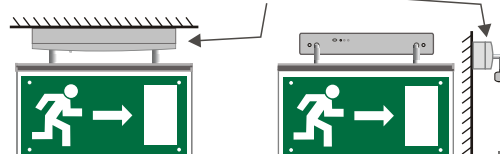

Ceiling mounted

Wall mounted

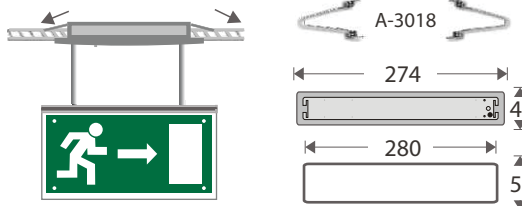

Recess mounted on a suspended ceiling.